



LED间隔柱 LED SPACER SUPPORT

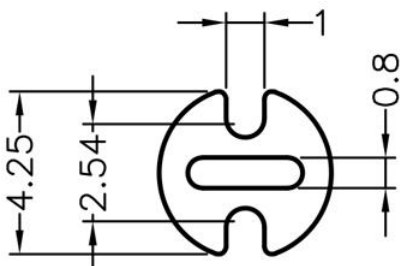

MATERIAL : NYLON 66(UL)
 FLAME CLASS : 94V-0,94V-2
 COLOR : BLACK,NATURAL
 UNIT : mm

用途： 使LED立于PC板上，高度一致，不断脚。

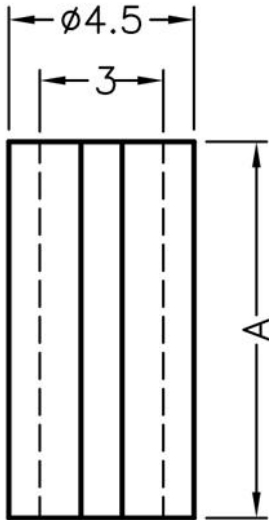

PART NO	A	L	P	PACKAGE
LEDSS-128	1.5	3.0	1	2000
LEDSS-129	2.0	3.0	1	2000
LEDSS-130	2.5	3.0	1	2000
LEDSS-131	3.0	3.0	1	2000
LEDSS-132	3.5	3.0	1	2000
LEDSS-133	4.0	3.0	1	2000
LEDSS-134	4.5	3.0	1	2000
LEDSS-135	5.0	3.0	1	2000
LEDSS-136	5.5	3.0	1	2000
LEDSS-137	6.0	3.0	1	2000
LEDSS-138	6.5	3.0	1	2000
LEDSS-139	7.0	3.0	1	2000
LEDSS-140	7.5	3.0	1	2000
LEDSS-141	8.0	3.0	1	2000
LEDSS-142	8.5	3.0	1	2000
LEDSS-143	9.0	3.0	1	2000
LEDSS-144	9.5	3.0	1	2000
LEDSS-145	10.0	3.0	1	2000
LEDSS-146	10.5	3.0	1	2000
LEDSS-147	11.0	3.0	1	2000
LEDSS-148	11.5	3.0	1	2000
LEDSS-149	12.0	3.0	1	2000
LEDSS-150	12.5	3.0	1	2000
LEDSS-151	13.0	3.0	1	2000
LEDSS-152	13.5	3.0	1	2000
LEDSS-153	14.0	3.0	1	2000
LEDSS-154	14.5	3.0	1	2000
LEDSS-155	15.0	3.0	1	2000
LEDSS-156	15.5	3.0	1	2000
LEDSS-382	17.0	3.0	1	2000
LEDSS-157	18.0	3.0	1	2000
LEDSS-383	1.0	3.0	1	2000
LEDSS-384	16.0	3.0	1	2000

1

(规格 / 尺寸) 代码说明：

A : 使LED立于PC板上，高度一致，不断脚。

L : LED建议装配规格

P : 装配灯数